


Excel Dual Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500 m Reel Ice Blue

Item Code: 100-194

excel
without compromise.

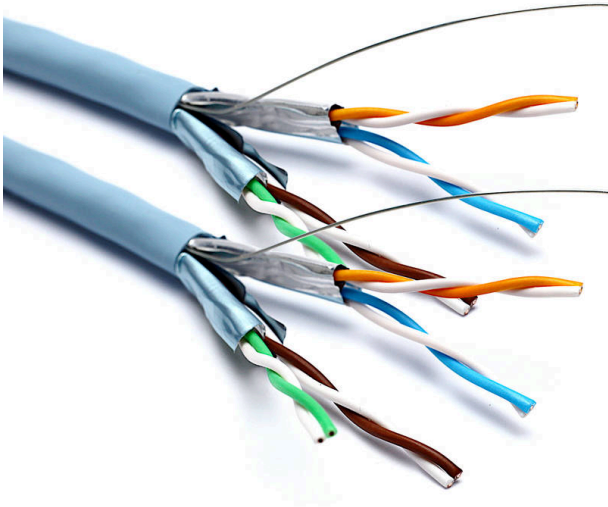

✕ Cat6a Solid Copper Cable

✕ U/FTP No Overall Screening

✕ S Foil Screened Pairs

✕ Outer sheath colour Ice Blue

✕ Reaction-to-fire class according to EN 13501-6: Dca

✕ Smoke development class according to EN 13501-6: s2

Product Overview

Excel Dual Cat6a cable screened U/FTP LSOH S-Foil CPR Euroclass Dca designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards and supplied on 500m reels. Excel Cat 6A Screened (U/FTP) Cable takes the performance capabilities of copper infrastructure to new levels. This delivers Class EA/ Augmented Category 6 link performance over distances of up to 90 metres which supports the applications including 10GBASE-T, 10 Gigabit Ethernet.

Each cable consists of two sets of two pairs wrapped together in an "S" configuration with high quality, strong, aluminium/polyester foil tape providing screening for each pair. The "S" Foil configuration ensures separation of the pairs that ensures the performance and is manufactured as a Dual Cable.

The individual pairs are set to different lay lengths to ensure optimum performance.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	23
Conductor category	Class 1 = solid
Total number of cores	16
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)


Excel Dual Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500 m Reel Ice Blue

Item Code: 100-194

excel
without compromise.

Core identification	Colour
Overall screening	None
Conductor screening	Foil
Outer sheath material	Copolymer, thermoplastic (LSOH)
Outer sheath colour	Ice blue
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d1
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	13.4 mm
Installation Temperature Range	0...60 °C
Operating Temperature Range	-20...60 °C
Category	6A (IEC)
NVP value	78 %

Cross-section diagram

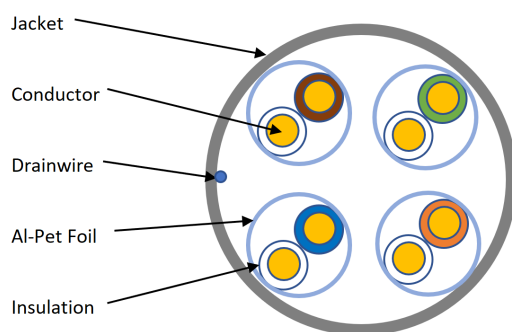

Cable specifications

Features	Values
Dielectric strength	2.5kV for 2s
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Excel Dual Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500 m Reel Ice Blue

Item Code: 100-194



Part Number Table

Part Number	Description
100-191	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500 m Reel Ice Blue
100-191-BK	Excel Solid Cat6a Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500m Reel Black
100-191-WT-305M	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 305m Reel White
100-194	Excel Dual Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Dca 500 m Reel Ice Blue
100-198	Excel Solid Cat6A Cable U/FTP LSOH CPR Euroclass Dca 500m Reel White
170-191	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Cca 500m Reel Ice Blue
170-191-305M	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Cca 305m Reel Ice Blue
170-191-WT-305M	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Cca 305m Reel White
170-194	Excel Category 6A Dual Cable U/FTP S-Foil Cca LSOH 500m Reel - Ice Blue
170-198	Excel Solid Cat6A Cable U/FTP S-Foil LSOH CPR Euroclass Cca 500m Reel White

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.